

Stability in three designs

Hawa Straightening fitting




The new Hawa Straightening fitting


Optimum stabilization of wooden doors in three different designs

No door warping, even after years: The new straightening fitting stabilizes wooden doors weighing up to 80 kg. It blends into the surface of the door in a filigree way, can be glued on or fitted with brackets, and is now also available in the elegant anodized black designer version.

Without brackets

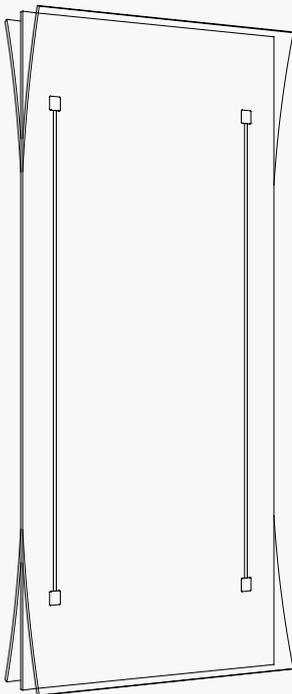

With brackets

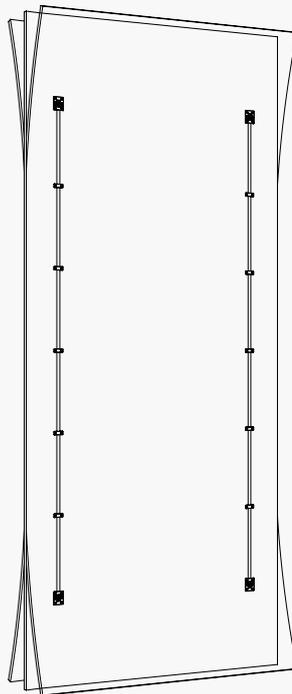

Can be combined with

Hawa Clipo

Hawa Combino

Hawa Frontino

Hawa Regal

Hawa Concepta

Hawa Folding Concepta

Hawa Multifold

Hawa Aperto

Hawa Straightening fitting for stabilizing 1215 to 2850 mm (3'11 27/32" to 9'4 7/32") high wooden doors (not suitable for hardwood)


Technical specifications

-  **Flexibility** The right solution for every application thanks to selectable heights and three different finish colors
The tightening profile can be glued on or screwed on as required
-  **Comfort** The stable structure holds the doors in position and remains silent during operation

Technical specifications

-  1215–2850 mm
(3'11 27/32"–9'4 7/32")
-  300–1600 mm
(11 13/16"–5'3")
-  16–50 mm
(5/8"–1 31/32")

Installation examples

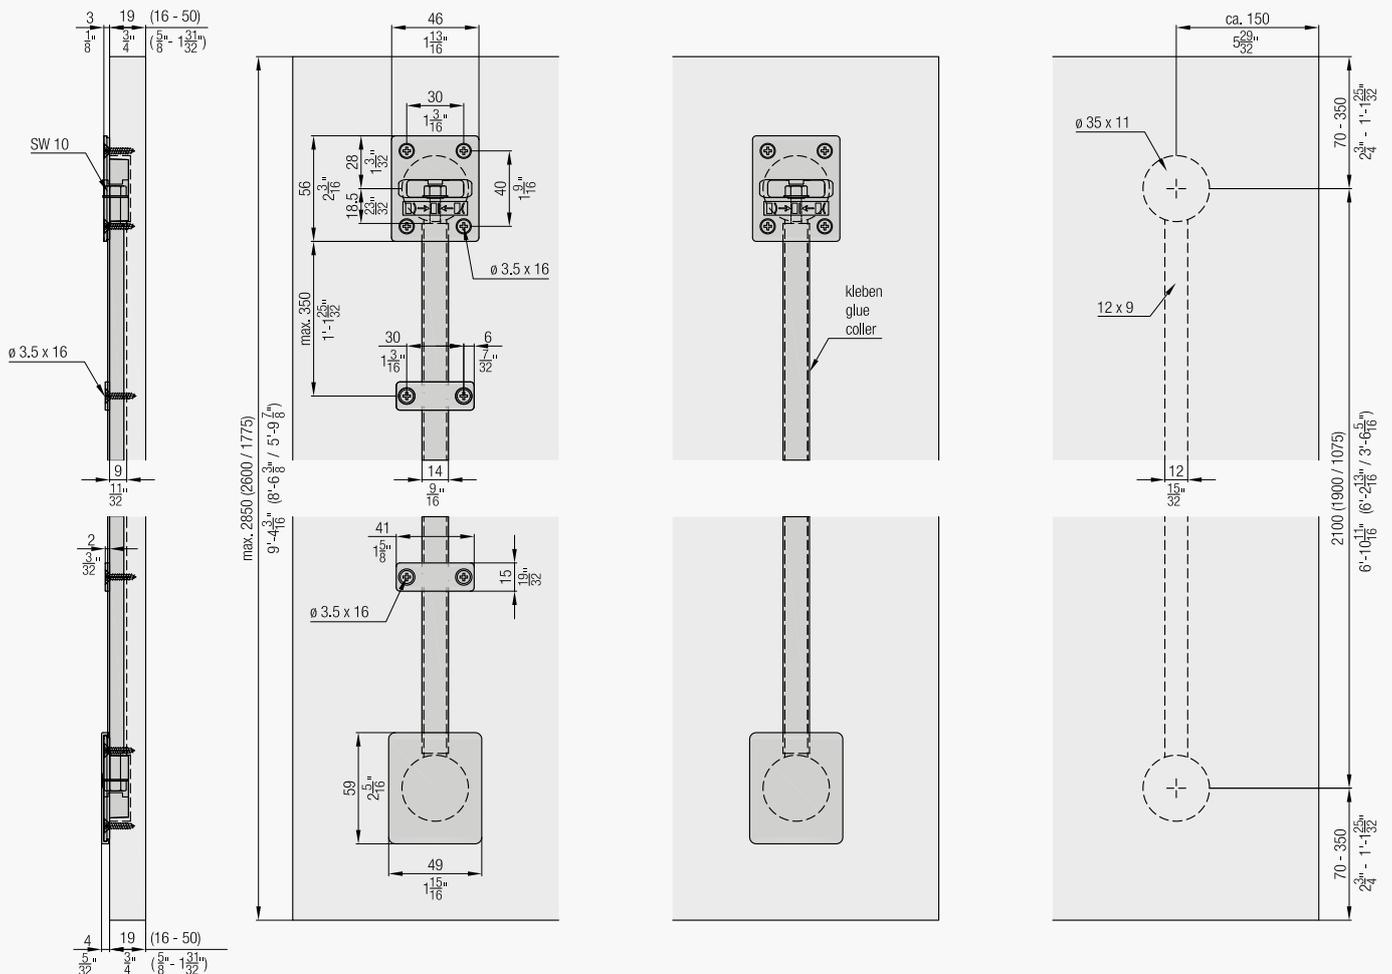

Accessories

Aluminum

	Nr.
Straightening fitting for doors up to 2240–2850 mm (7'4 3/16"–9'4 7/32"), aluminum, anodized, can be shortened for doors 1215–2240 mm (3'11 27/32"–7'4 3/16")	056.3192.071
Straightening fitting for doors up to 2040–2600 mm (6'8 5/16"–8'6 3/8"), aluminum, can be shortened for doors 1775–2040 mm (5'9 7/8"–6'8 5/16")	056.3192.072
Straightening fitting for doors up to 1215–1775 mm (3'11 27/32"–5'9 7/8"), aluminum	056.3192.073

Set consisting of:		mm (inch)	056.3192.071	056.3192.072	056.3192.073	No.
	Armature element, zinc alloy		4			056.0199.001
	Bracket, plastic, black		10	10	10	056.2023.001
	Thread-cutting hexagon screw, M6x40 mm, steel, zinc-plated		4	4	4	056.0130.101
	Tightening profile, aluminum, anodized	2063 6'9 7/32"	2			056.0200.226
	Armature element, plastic, black			4	4	056.2024.001
	Tightening profile, aluminum	1863 6'1 11/32"		2		056.0200.186
	Tightening profile, aluminum	1038 3'4 7/8"			2	056.0200.103

Ordering information

– Type and number of sets

Optional ordering information

– Number of cover caps
– Number of brackets

Planning/execution

All straightening fittings can be shortened to the required dimension.

Installation instructions No. 788.2000.314 have to be used for planning and execution. Further information about the product can be found on www.hawa.com.

Aluminum, black anodized

	Nr.
Straightening fitting for doors up to 2240–2850 mm (7'4 3/16"–9'4 7/32"), aluminum, anodized, black	056.3192.074
Straightening fitting for doors up to 2040–2600 mm (6'8 5/16"–8'6 3/8"), aluminum, anodized, black, can be shortened for doors 1775–2040 mm (5'9 7/8"–6'8 5/16")	056.3192.075
Straightening fitting for doors up to 1215–1775 mm (3'11 27/32"–5'9 7/8"), aluminum, anodized, black	056.3192.076

Set consisting of:		mm (inch)	056.3192.074	056.3192.075	056.3192.076	No.
	Armature element, zinc alloy		4			056.0199.001
	Cover cap, plastic, black		4			056.0201.001
	Thread-cutting hexagon screw, M6x40 mm, steel, zinc-plated		4	4	4	056.0130.101
	Tightening profile, aluminum, anodized, black	2063 6'9 7/32"	2			056.0200.207
	Armature element, plastic, black			4	4	056.2024.001
	Tightening profile, aluminum, anodized, black	1863 6'1 11/32"		2		056.0200.187
	Tightening profile, aluminum, anodized, black	1038 3'4 7/8"			2	056.0200.104

Accessories

	No.
	056.0201.071
	056.0118.004

Hawa Sliding Solutions AG

Untere Fischbachstrasse 4, 8932 Mettmenstetten, Switzerland
Tel. +41 44 787 17 17, Fax +41 44 787 17 18
info@hawa.com, www.hawa.com